



APPROVALS



 **ENGINEERING CODE**
269KA51

 **APPROVED REFRIGERANT**
R-134a

 **POWER SUPPLY**
220-240 V 50 Hz

 **STANDARD CONDITIONS**
EN12900

 **APPLICATION**
LBP

 **COOLING CAPACITY**
226 W (LBP)

 **EFFICIENCY**
1.09 W/W (LBP)

 **MOTOR TYPE**
CSIR

 **STARTING TORQUE**
HST

DATA

General Data

Type	Hermetic reciprocating
Technology Type	On-Off
Displacement	16.8 cm ³
Compressor Cooling	Fan/NotControlled/220
Fan Air Flow	520 m ³ /h
Expansion Device	Capillary Tube or Expansion Valve
Horse Power	1/2 hp
Max Condensing Pressure Operating	13.92 bar
Max Condensing Pressure Peak	15.62 bar
Power Supply	220-240 V 50 Hz
Evaporating Temperature Range	-30 °C to -5 °C

Electrical Data

Motor type	CSIR
Starting Torque	HST

Mechanical Data

Maximum Recommended Refrigerant Charge	350 g
Oil Charge	350 ml
Oil Type Configuration	ESTER
Oil Type Viscosity	ISO22
Pressurization	Dry air charge
Weight	11.6 Kg
Free Internal Volume	2.1 L

Electrical Components

	Description
Start Capacitor	72-88 Uf / 330 V
Starting Device	Relay MTRPH-47-65*
Motor Protection	T0059/G6

External Characteristics

Base Plate		European	
Tray Holder		No	
Height		206 mm	
Connector	Internal Diameter		Shape
Suction	8.1 mm	Slanted 42°/Copper	
Discharge	6.1 mm	Straight/Copper	
Process	6.1 mm	Slanted 42°/Copper	

PERFORMANCE

Rated Points

Condensing Temperature	Evaporating Temperature	Cooling Capacity	Power Consumption	Current	Gas Flow Rate	Efficiency
40.00°C	-35.00°C	226 W	207 W	1.93 A	4.87 kg/h	1.09 W/W

Test Condition: EN12900LBP, Fan/NotControlled/220, Return Gas 20°C, Evaporation -35.00°C, Condensing 40.00°C, Ambient 35°C , Liquid 40°C, Subcooling 0K. Data in accordance to EN 12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.

Performance Curve Data

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Current A	Gas Flow Rate kg/h	Efficiency W/W
-30	322	246	2.01	6.76	1.31
-25	431	287	2.12	9.07	1.51
-20	565	330	2.27	11.92	1.71
-15	725	377	2.44	15.34	1.92
-10	912	428	2.63	19.39	2.13
-5	1128	482	2.84	24.12	2.34

Test Condition: EN12900LBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data in accordance to EN 12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Power W	Current A	Gas Flow Rate kg/h	Efficiency W/W
-30	277	254	2.04	6.36	1.09
-25	374	301	2.17	8.61	1.24
-20	493	353	2.34	11.38	1.4
-15	634	409	2.54	14.73	1.55
-10	802	470	2.77	18.69	1.7
-5	995	537	3.04	23.32	1.85


Test Condition: EN12900LBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data in accordance to EN 12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.

Condensing Temperature 55°C


Evaporating Temperature °C	Cooling Capacity W	Power W	Current A	Gas Flow Rate kg/h	Efficiency W/W
-25	314	308	2.19	8.03	1.02
-20	417	366	2.39	10.72	1.14
-15	541	431	2.62	13.97	1.26
-10	688	501	2.9	17.84	1.37
-5	859	578	3.21	22.37	1.49

Test Condition: EN12900LBP, Fan/NotControlled/220, Return Gas 20°C, Ambient 35°C , Subcooling OK. Data in accordance to EN 12900:2013 and AHRI 540:2015 polynomial equation and uncertainty guidance.


Operating Envelope

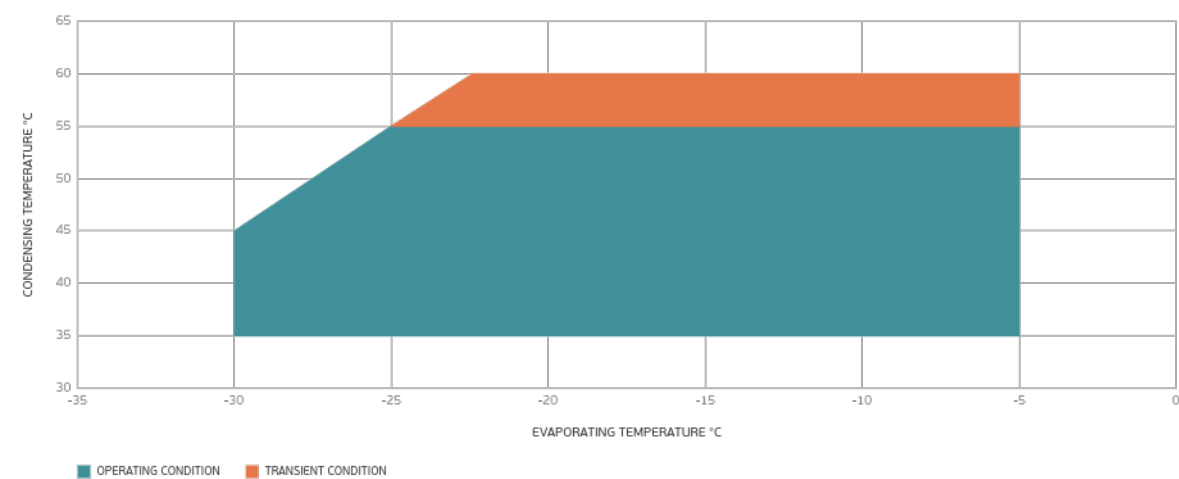

External Dimensions

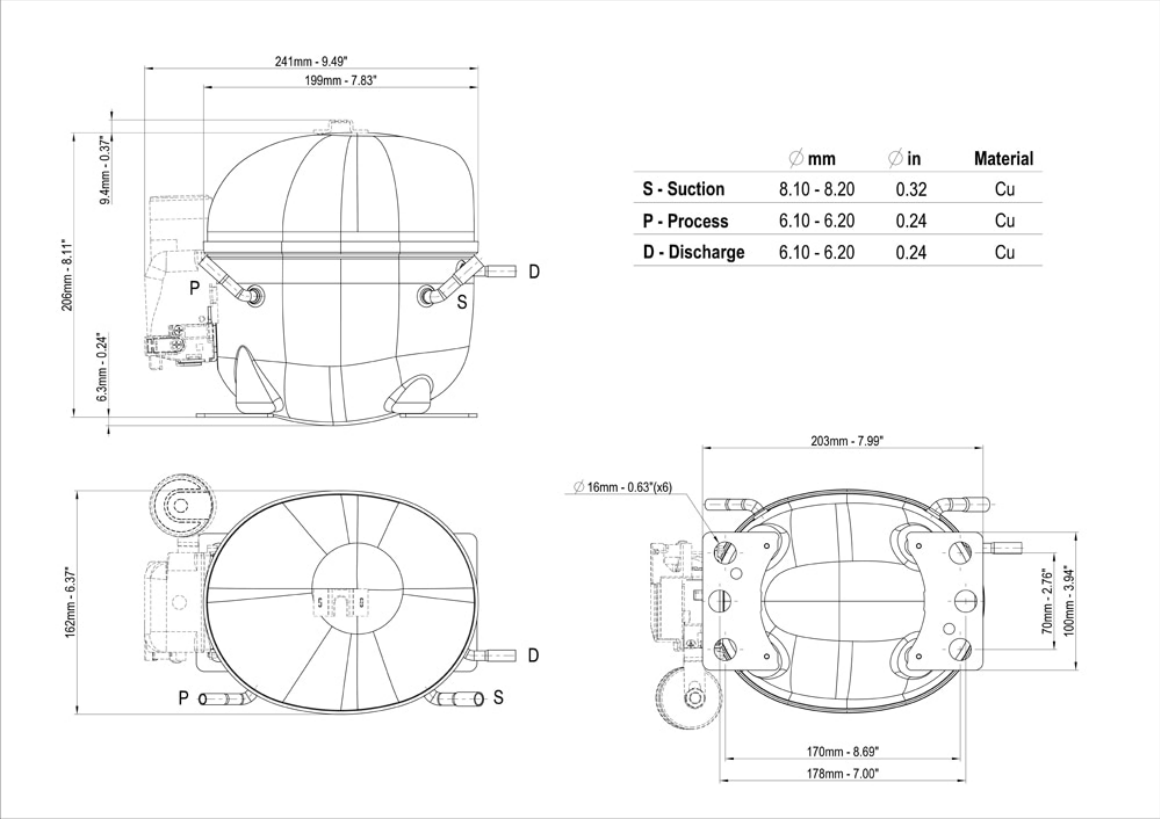

Wiring Diagram

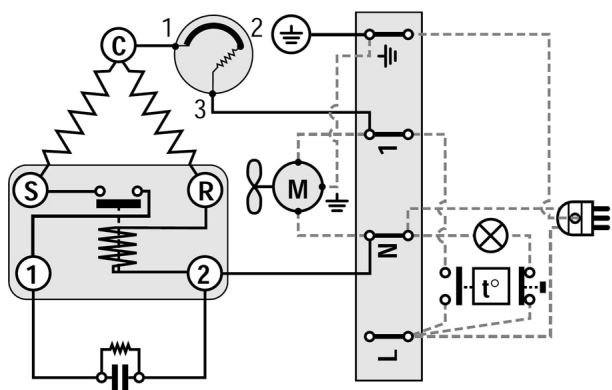

Assembly Instructions

